


Independent Tests Conducted at Kinectrics per ASTM F1959.

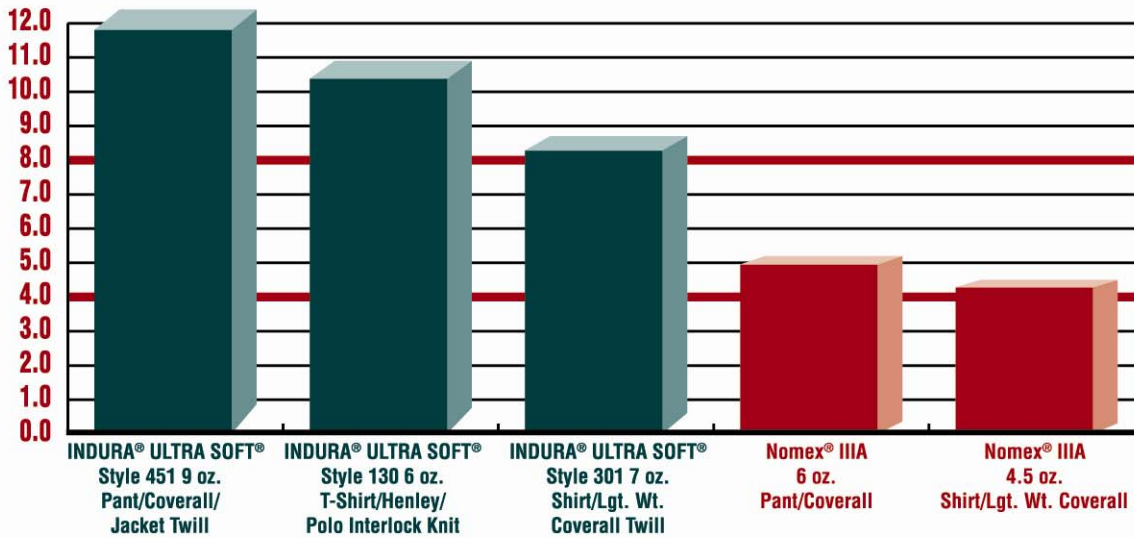

NFPA 70E

Minimum of 8[†] for HRC 0, 1 & 2.

Minimum of 4^{††} for HRC 0 & 1.

[†]Products that meet HRC 2 also meet HRC 0 and 1.

^{††}Products that meet HRC 1 also meet HRC 0.

Independent Tests Conducted at Kinectrics per ASTM F1959.

INDURA® Ultra Soft®		ATPV (cal/cm²)
PRODUCT/STYLE	Fabric Description	
INDURA® Ultra Soft® 88% Cotton 12% Nylon		
Style 301	7 oz. (237 g/m²) Shirt/Lgt. Wt. Coverall Twill	8.7
Style 451	9 oz. (305 g/m²) Pant/Coverall/Jacket Twill	12.4
Style 331	5.5 oz. (186 g/m²) Chambray Denim Shirting	6.0
Style 341	5.5 oz. (186 g/m²) Shirting Twill	6.1
Style 881	8 oz. (270 g/m²) Pant/Coverall/Jacket Basketweave	9.8
Style 961	11 oz. (372 g/m²) Outerwear/Jacket/Pant DUCK	12.7
Style 391	12 oz. (406 g/m²) Pant/Jacket Denim	19.5
Style 981	13 oz. (440 g/m²) Outerwear/Jacket/Pant DUCK	13.4
Style 381	14.75 oz. (520 g/m²) Pant/Jacket Heavyweight Denim	17.5
Style 801	13 oz. (440 g/m²) Jacket/Pant Sateen	21.0

INDURA® Ultra Soft® Knits		ATPV (cal/cm²)
PRODUCT/STYLE	Fabric Description	
INDURA® Ultra Soft® Knits 88% Cotton 12% Nylon		
Style 130	6.0 oz. (212 g/m²) T-Shirt/Henley/Polo Interlock Knit	10.9
Style 180	11 oz. (372 g/m²) Sweatshirt/Hoodie Fleece	21.8 (Ebt)